




## LOAD/SPAN TABLES

---

## TECHNICAL DATA | 7.2 x 1.5" Load/Span Tables (Standard profiles)

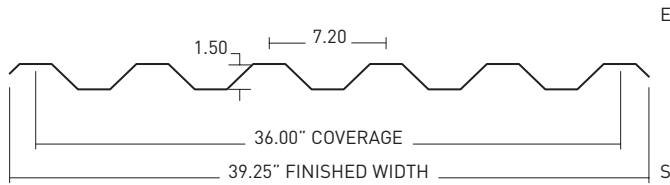

SIDING / ROOFING WIND LOADS (PSF)															
	20			30			40			50			60		
	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3
Tred-Safe	10'2"	13'2"	12'7"	8'11"	10'9"	11'0"	8'1"	9'3"	10'0"	7'6"	8'4"	9'3"	7'1"	7'5"	8'6"
1440	9'10"	12'5"	12' 1"	8'7"	10'1"	10'7"	7'9"	8'9"	9'7"	7'3"	7'10"	8'9"	6'10"	6'7"	7'6"
1240	8' 10"	11'11"	10'11"	7'9"	9'1"	9'7"	7'0"	6'10"	7'9"	6'6"	5'5"	6'2"	6'2"	4'6"	5'2"
1040	8'4"	10'10"	10'4"	7'3"	7'7"	8'7"	6'7"	5'8"	6'5"	6'2"	4'6"	5'2"	5'9"	3'9"	4'4"
840	7'9"	9'1"	9'7"	6'9"	6'1"	6'11"	6'2"	4'6"	5'2"	5'8"	3'8"	4'2"	5'4"	3'0"	3'5"
1230	7'8"	10'3"	9'6"	6'8"	7'9"	8'3"	6'1"	5'10"	6'7"	5'8"	4'8"	5'3"	5'4"	3'11"	4'5"
830	6'8"	7'9"	8'3"	5'10"	5'2"	5'10"	5'4"	3'11"	4'5"	4'11"	3'1"	3'6"	4'8"	2'7"	2'11"
RFM 17	10'11"	11'6"	12'10"	9'4"	9'4"	10'6"	8'1"	8'1"	9'1"	7'3"	7'3"	8'1"	6'7"	6'7"	7'5"
RFM 14	10'4"	10'7"	11'10"	8'8"	8'8"	9'8"	7'6"	7'4"	8'3"	6'9"	5'10"	6'8"	6'2"	4'10"	5'6"
RFM 11	9'8"	9'1"	10'4"	7'11"	6'1"	6'11"	6'10"	4'7"	5'2"	6'2"	3'8"	4'2"	5'7"	3'0"	3'5"
ROOFING LIVE LOADS (PSF)															
	20			30			40			50			60		
	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3
Tred-Safe	7'9"	10'5"	9'7"	6'10"	9'1"	8'5"	6'2"	8'1"	7'8"	5'9"	7'2"	7'1"	5'5"	6'7"	6'8"
1440	7'6"	10'0"	9'3"	6'6"	8'9"	8'1"	5'11"	7'7"	7'4"	5'6"	6'9"	6'10"	5'2"	6'2"	6'5"
1240	6'9"	9'1"	8'4"	5'11"	7'11"	7'4"	5'4"	7'2"	6'8"	5'0"	6'6"	6'2"	4'8"	5'11"	5'10"
1040	6'4"	8'6"	7'10"	5'7"	7'5"	6'10"	5'1"	6'8"	6'3"	4'8"	5'11"	5'10"	4'5"	5'5"	5'5"
840	5'11"	7'11"	7'4"	5'2"	6'10"	6'5"	4'8"	5'11"	5'1"	4'4"	5'4"	5'5"	4'1"	4'0"	5'12"
1230	5'10"	7'10"	7'3"	5'1"	6'10"	6'4"	4'8"	6'3"	5'9"	4'4"	5'9"	5'4"	4'1"	5'5"	5'0"
830	5'1"	6'10"	6'4"	4'6"	6'0"	5'6"	4'1"	5'5"	5'0"	3'9"	5'1"	4'8"	3'7"	4'9"	4'5"
RFM 17	8'4"	9'11"	10'3"	7'3"	8'1"	9'0"	6'7"	7'0"	7'10"	6'2"	6'3"	7'0"	5'9"	5'9"	6'5"
RFM 14	7'11"	9'2"	9'9"	6'11"	7'6"	8'5"	6'3"	6'6"	7'3"	5'10"	5'10"	6'6"	5'4"	5'4"	5'11"
RFM 11	7'5"	8'5"	9'2"	6'6"	6'10"	7'8"	5'11"	5'11"	6'8"	5'4"	5'4"	5'11"	4'10"	4'10"	5'5"

### Notes

1. Load/Span limits are based on full scale panel tests representing actual field conditions.
2. Panel span/deflection ratios (L/D) shall be limited to U20 for wind loads and L/45 for live loads.
3. Factors of safety shall be 1.88 for panels subjected to wind loads and 2.5 for panels subjected to live loads.
4. Load/Span limits are based on fasteners with 3/4" (.729") washers in every low. Significant span increases may be achieved by utilizing fasteners with 1-1/8" washers.
5. Other panel types, weights, glass reinforcements, resin types, lengths, fastening options, or special loading requirements may be available; please contact Resolite Customer Service Department for more information.
6. All roof slopes are a minimum of 1:12. For slopes less than 1:12, contact Resolite Customer Service Dept.

### Dimensions

#### Standard

- Finish Width: 39.25"
- Coverage Width: 43.2"
- Lengths: 4' to 40'

#### Optional


- Finish Width: 46.50"

PANEL TYPES	NOMINAL WT. (OZ/SQ FT)
1645 Tred-Safe	16
1440 thru 840	14 thru 8
1230 thru 830	12 thru 8
RFM 17 thru 11	17 thru 11

### ADDITIONAL INFORMATION

Consult Table of Contents for specific information regarding:

- FRP Panel Design
- Fire Resistance & Codes
- Corrosion & Weathering
- Color, Finish, & Light Transmission
- Fasteners & Accessories
- Product Descriptions
- FRP Panel Specifications
- Profile Selection Guide
- Flashing Details
- Installation, Storage, & Handling
- FRP louvers, Ventilators, Gutters & Downspouts

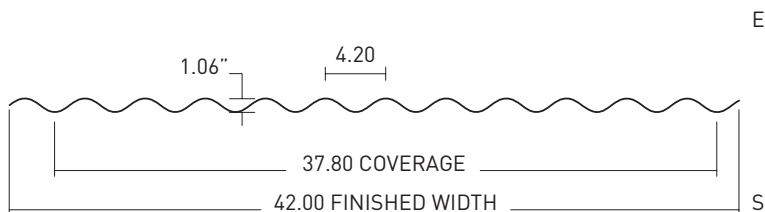

SIDING / ROOFING WIND LOADS (PSF)															
	20			30			40			50			60		
	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3
Tred-Safe	7'4"	9'5"	9'0"	6'4"	7'8"	7'10"	5'9"	6'8"	7'2"	5'4"	6'0"	6'8"	5'1"	5'5"	6'1"
1440	7'0"	8'11"	8'8"	6'1"	7'3"	7'7"	5'7"	6'3"	6'10"	5'2"	5'7"	6'3"	4'10"	5'2"	5'9"
1240	6'4"	8'6"	7'10"	5'6"	7'0"	6'10"	5'0"	6'0"	6'3"	4'8"	5'5"	5'9"	4'5"	4'11"	5'5"
1040	6'0"	7'10"	7'4"	5'2"	6'4"	6'5"	4'9"	5'6"	5'10"	4'5"	4'11"	5'5"	4'2"	4'6"	5'0"
840	5'6"	7'0"	6'10"	4'10"	5'8"	6'0"	4'5"	4'11"	5'5"	4'1"	4'5"	4'11"	3'10"	4'0"	4'6"
1230	5'6"	7'4"	6'9"	4'9"	6'5"	5'11"	4'4"	5'10"	5'5"	4'0"	5'5"	5'0"	3'10"	4'11"	4'8"
830	4'9"	6'5"	5'11"	4'2"	5'7"	5'2"	3'10"	4'11"	4'8"	3'6"	4'5"	4'4"	3'4"	4'0"	4'1"
RFM 17	7'9"	8'3"	9'2"	6'9"	6'9"	7'6"	5'10	5'10"	6'6"	5'2"	5'2"	5'10"	4'9"	4'9"	5'4"
RFM 14	7'5"	7'7"	8'6"	6'3"	6'3"	6'11"	5'5"	5'5"	6'0"	4'10"	4'10"	5'5"	4'5"	4'5"	4'11"
RFM 11	6'11"	6'11"	7'9"	5'8"	5'8"	6'4"	4'11"	4'11"	5'6"	4'5"	4'5"	4'11"	4'0"	4'0"	4'6"
ROOFING LIVE LOADS (PSF)															
	20			30			40			50			60		
	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3
Tred-Safe	5'7"	7'6"	6'10"	4'10"	6'6"	6'0"	4'5"	5'9"	5'5"	4'1"	5'2"	5'1"	3'10"	4'9"	4'9"
1440	5'4"	7'2"	6'7"	4'8"	6'3"	5'9"	4'3"	5'5"	5'3"	3'11"	4'10"	4'10"	3'9"	4'5"	4'7"
1240	4'10"	6'6"	6'0"	4'3"	5'8"	5'3"	3'10"	5'2"	4'9"	3'7"	4'8"	4'5"	3'4"	4'3"	4'2"
1040	4'7"	6'1"	5'7"	4'0"	5'4"	4'11"	3'7"	4'9"	4'6"	3'4"	4'3"	4'2"	3'2"	3'11"	3'11"
840	4'3"	5'8"	5'3"	3'8"	4'11"	4'7"	3'4"	4'3"	4'2"	3'1"	3'10"	3'10"	2'11"	3'6"	3'7"
1230	4'2"	5'7"	5'2"	3'8"	4'11"	4'6"	3'4"	4'5"	4'1"	3'1"	4'2"	3'10"	2'11"	3'11"	3'7"
830	3'8"	4'11"	4'6"	3'2"	4'3"	3'11"	2'11"	3'11"	3'7"	2'8"	3'7"	3'4"	2'6"	3'5"	3'2"
RFM 17	5'11"	7'1"	7'4"	5'2"	5'10"	6'5"	4'9"	5'0"	5'8"	4'5"	4'6"	5'0"	4'1"	4'1"	4'7"
RFM 14	5'8"	6'7"	7'0"	4'11"	5'5"	6'0"	4'6"	4'8"	5'3"	4'2"	4'2"	4'8"	3'10"	3'10"	4'3"
RFM 11	5'4"	6'0"	6'7"	4'8"	4'11"	5'6"	4'3"	4'3"	4'9"	3'10"	3'10"	4'3"	3'6"	3'6"	3'11"

**Notes**

1. Load/Span limits are based on full scale panel tests representing actual field conditions.
2. Panel span/deflection ratios (L/D) shall be limited to L/20 for wind loads and L/45 for live loads.
3. Factors of safety shall be 1.88 for panels subjected to wind loads and 2.5 for panels subjected to live loads.
4. Load/Span limits are based on fasteners with 5/8" washers in every low.
5. Other panel types, weights, glass reinforcements, resin types, lengths, fastening options, or special loading requirements may be available; please contact Resolite Customer Service Department for more information.
6. All roof slopes are a minimum of 1:12. For slopes less than 1:12, contact Resolite Customer Service Dept.

**Dimensions**
**Standard**

- Finish Width: 42"
- Coverage Width: 37.8"
- Lengths: 4' to 40'

PANEL TYPES	NOMINAL WT. (OZ/SQ FT)
1645 Tred-Safe	16
1440 thru 840	14 thru 8
1230 thru 830	12 thru 8
RFM 17 thru 11	17 thru 11

**ADDITIONAL INFORMATION**

Consult Table of Contents for specific information regarding:

- FRP Panel Design
- Fire Resistance & Codes
- Corrosion & Weathering
- Color, Finish, & Light Transmission
- Fasteners & Accessories
- Product Descriptions
- FRP Panel Specifications
- Profile Selection Guide
- Flashing Details
- Installation, Storage, & Handling
- FRP louvers, Ventilators, Gutters & Downspouts



1-800-RESOLITE (737-6548) [www.resolite.com](http://www.resolite.com)

---

**Resolite FRP Composites**

285 Industrial Drive,  
Moscow, TN 38057