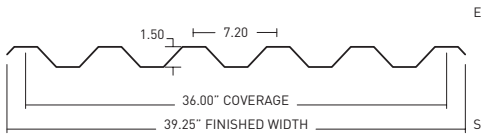

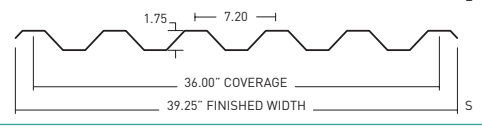
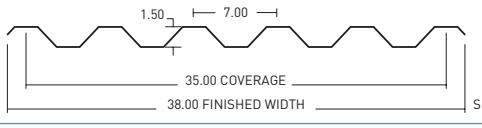
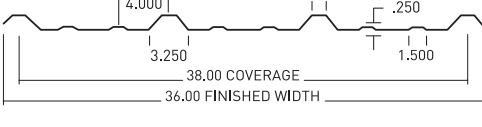

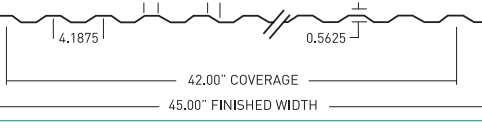
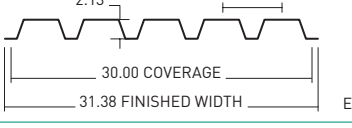
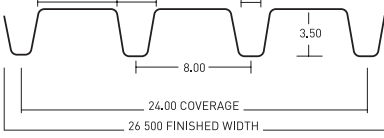




PROFILE SELECTION GUIDE

Standard Profiles

	Fire rated			Non-FR	Load span data see page listed
	FS25A/CRFS25A			Ac/CR-Ac	
	Tred-Safe	'40' series	'30' series	'30' series	
	✓	✓	✓	✓	36
	✓	✓	✓	✓	37
	OPT	✓	✓	✓	38
	OPT	✓	✓	✓	39
		✓	✓	✓	40
		✓	✓	✓	41
		✓	✓	✓	42
	VINYL ESTER RESIN				24
	VINYL ESTER RESIN				24

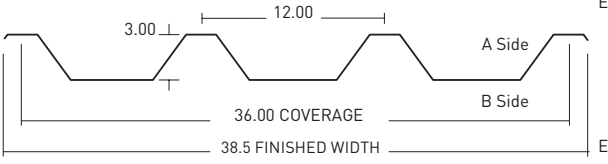
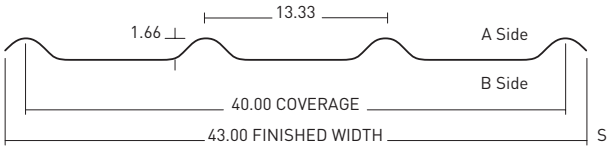
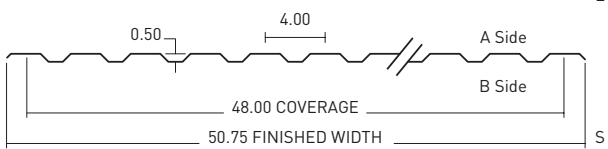
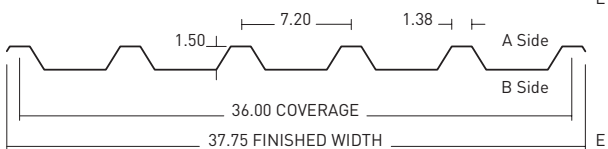
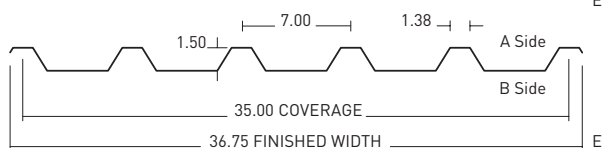
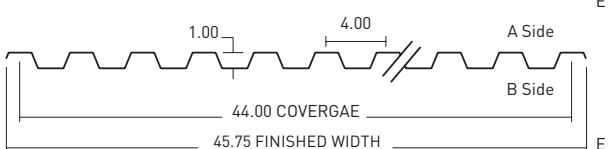
Notes

1. Panels are manufactured in standard lengths from 4' to 40'.
2. Surface texture is designated by E for Embossed and S for Smooth.
3. Coverage width and length tolerance for all panel profiles is 1/4".
4. Stock panels available in 7.2 x 1.5" and 4.2 x 1-1/16". Contact Resolite's Customer Service for availability

The 7.2 x 1.5 and 4.2 x 1 1/16" profiles are the most commonly used and most readily available of the Resolite FRP panels.

For other standard profiles availability and minimum order requirements, contact Customer Service Department.

Standard Profiles

	Fire rated		Non-RF	Load span data see page listed
	FS25A/CRFS25A		Ac/CR-Ac	
	Tred-Safe	'40' series	'30' series	
	✓	✓	✓	43
NOT AVAILABLE IN TYPES 830 AND 840				
	✓	✓	✓	44
		✓	✓	45
	✓	✓	✓	46
	✓	✓	✓	47
		✓	✓	48

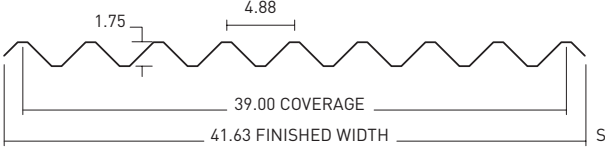
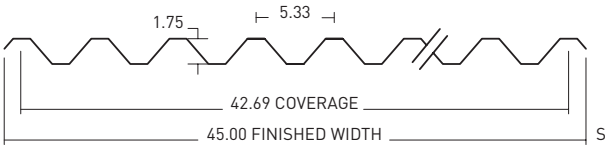

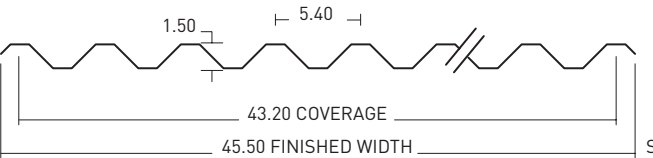
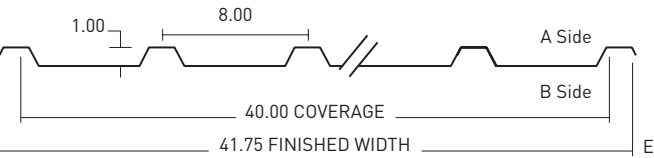
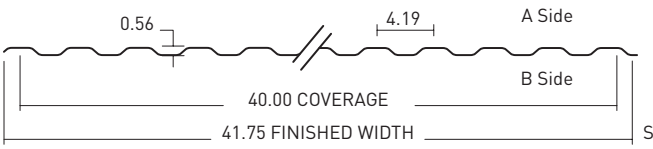
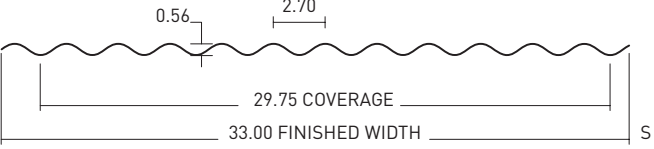
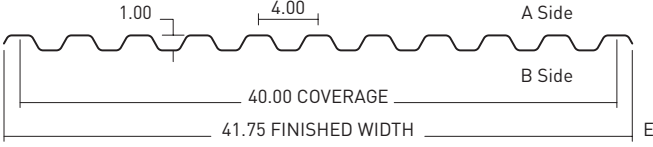
Notes

- Other profiles and flat panels may be available. Contact Resolite Customer Service for more information.
- Surface texture is designated by E for Embossed and S for Smooth.
- Panels are manufactured in standard lengths from 4' to 40'.
- Coverage width and length tolerance for all panel profiles is 1/4".
- Non-symmetrical profiles are designed above by showing the 'A' Side and 'B' Side. This information is required when ordering horizontal closure strips.

The profiles listed below are not commonly used. Some product, profile, weight and/or color combinations may have minimum order requirements.

Delivery restrictions may also apply. Contact Customer Service Department with your specific project requirements.

Standard Profiles

	Fire rated		Non-RF	Load span data see page listed
	Tred-Safe	'40' series	'30' series	
		✓	✓	49
NOT AVAILABLE IN TYPES 830 AND 840				
		✓	✓	50
		✓	✓	51
SPECIAL PROFILES (Contact Customer Service Department for panel availability)				
				
				
	FRP STRUCTURAL PULTRED SHAPES Are also available. Contact Resolite Customer Service for more information or to request a catalog (TD-122).			

Notes

- Other profiles and flat panels may be available. Contact Resolite Customer Service for more information.
- Surface texture is designated by E for Embossed and S for Smooth.
- Panels are manufactured in standard lengths from 4' to 40'.
- Coverage width and length tolerance for all panel profiles is 1/4".
- Non-symmetrical profiles are designed above by showing the 'A' Side and 'B' Side. This information is required when ordering horizontal closure strips.

The profiles listed below are not commonly used. Some product, profile, weight and/or color combinations may have minimum order requirements.

Delivery restrictions may also apply. Contact Customer Service Department with your specific project requirements.